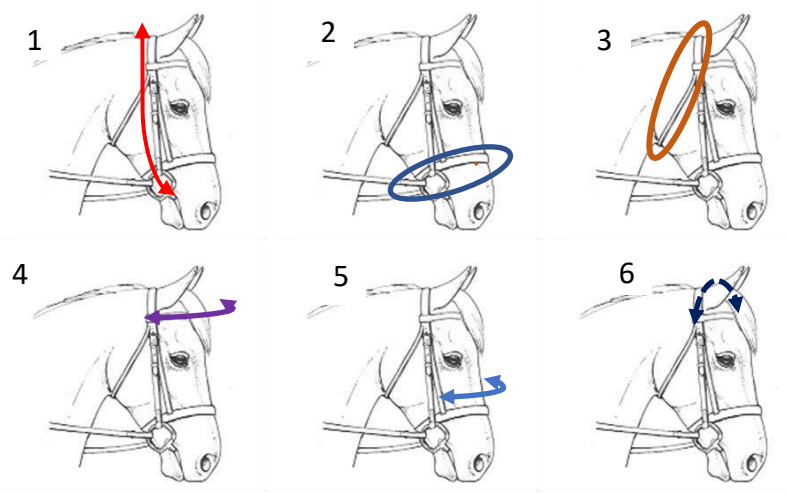
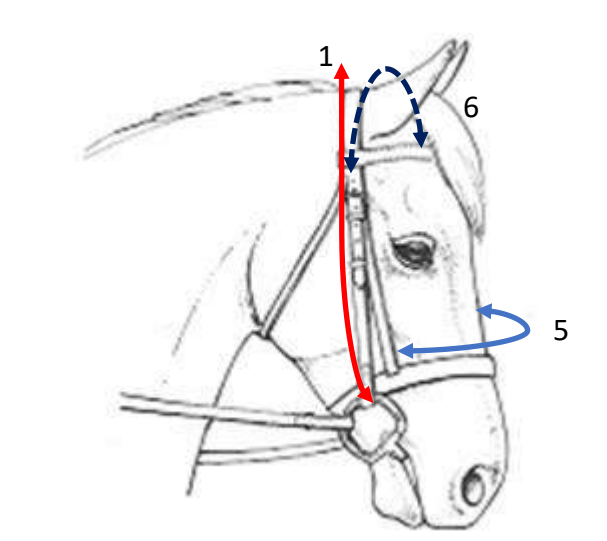


# Head Measurements for Made to Measure Bridle (in inches please)

	<ol style="list-style-type: none"> <li>1 Corner of mouth on one side, up over the top of head behind ears to corner of mouth on the other side. Diameter of usual bit ring also needed.</li> <li>2 Nose circumference – at position where noseband will lie, and at required tightness</li> <li>3 Throat circumference – measure following the line where throat-lash will lie, and at required tightness</li> <li>4 Brow – from back of ear base, across brow front to other back of ear base i.e. the length of browband needed</li> <li>5 Nose front – measure from cheek piece line, across nose front at position where noseband will lie, to other cheek piece line</li> <li>6 Over top of head – measure from base of one ear, over top of head to base of the other ear.</li> </ol>
<p>If it not easy or possible to measure the actual head, the measurements can be taken from a bridle that has been adjusted to fit, just measure the parts required as above. It does not matter what it looks like as the correct adjustment on the straps will be calculated from these measurements. See below:</p>	
	<ol style="list-style-type: none"> <li>1 Measure from top of bit ring, up over head to top of bit ring at other side, following the cheeks &amp; headstrap.</li> <li>2 and 3 For the <b>noseband &amp; throat circumferences</b> – measure from the buckle along the noseband and throat-lash to the hole that it is usually fastened on.</li> <li>4 For the <b>browband</b> – measure the end to end length (+ or – if necessary for required length)</li> <li>5 Measure the distance across the <b>noseband front</b> between the noseband cheek straps (+ or – if necessary for the required length)</li> <li>6 <b>Top of head</b> – either measure the distance between the splits of the headpiece (adjust + or – if necessary) or from the bottom edge of the browband, up over the top of head to bottom edge of browband other side.</li> </ol>